


§ 13.2 Ideal Projectile Motion

①

- Assume a cannonball of mass M is fired upward @ angle α , velocity v_0 . Find the maximum ht & distance traveled as a function of initial speed v_0 and angle α
- Find the angle α which shoots the ball further

Setup

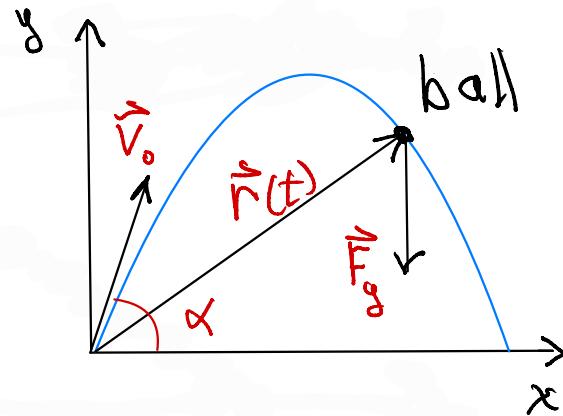

- Force of gravity: $\vec{F}_g = \overrightarrow{(0, -mg)} = m(0, -g)$
- Newton's Law: $m\vec{a} = \vec{F}_g$
 $m\ddot{\vec{r}} = \vec{F}_g$
- $\vec{r}(t) = x(t)\hat{i} + y(t)\hat{j}$
 $\dot{\vec{r}}(t) = \dot{x}(t)\hat{i} + \dot{y}(t)\hat{j} = \vec{v}(t)$
 $\ddot{\vec{r}}(t) = \ddot{x}(t)\hat{i} + \ddot{y}(t)\hat{j} = \vec{a}(t)$

Not inverse square because we are taking an approximation that only holds near surface of the earth

- Note: In the Kepler problem, we were given the motions of the planets, and set out to deduce the acceleration vector for the force that was creating that motion -
 - In most applications of Newton's Theory, the force is given as a function of \vec{r} , and $\vec{F} = m \vec{a} = m \frac{\vec{r}}{r^2}$ then becomes a 2nd order ordinary differential equation for the motion $\vec{r}(t)$. This requires two initial conditions $\vec{r}_0 = \vec{r}(t_0)$, $\vec{v}_0 = \vec{r}'(t_0)$, imposed at t_0 ($t_0 = 0$)
 - For example: Starting with the assumption of Newton's Force Law $\vec{F} = M_p \vec{a} = -G \frac{M_p M_s}{r^2} \frac{\vec{r}}{r}$ we could prove orbits are elliptical by solving the ODE
$$\boxed{\vec{r}''(t) = -G \frac{M_s}{r^3} \vec{r}}$$
- Much harder to solve D

Equations:

(for the trajectory $\vec{r}(t)$)


$$m \begin{pmatrix} \ddot{x} \\ \ddot{y} \end{pmatrix} = \begin{pmatrix} 0 \\ -mg \end{pmatrix} = m \begin{pmatrix} 0 \\ -g \end{pmatrix}$$

2

$$\begin{aligned}\ddot{x} &= 0 \\ \ddot{y} &= -g\end{aligned}$$

"the equations of motion"

Picture:

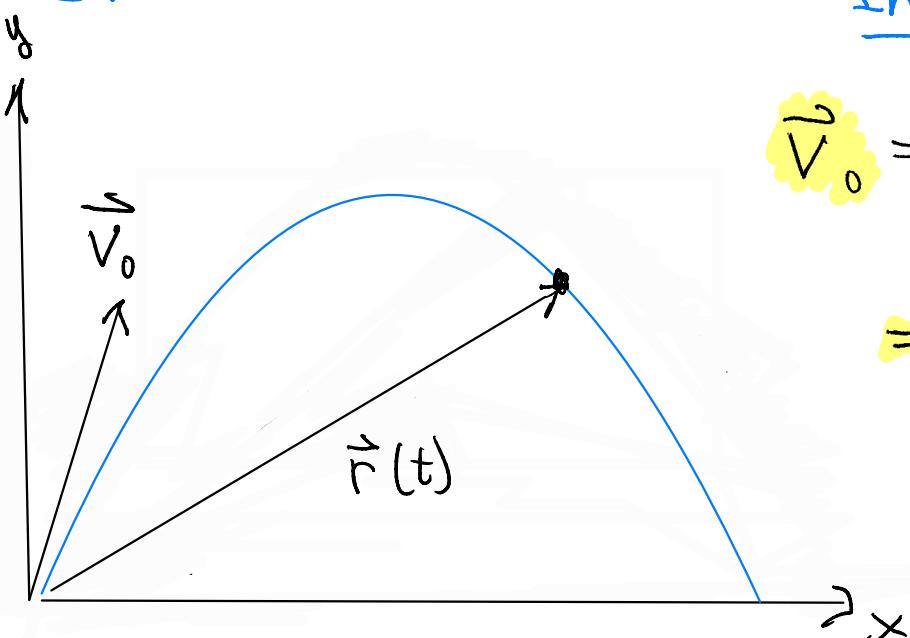

Initial Conditions

$$\vec{v}_0 = (v_x^0, v_y^0)$$

$$= v_0 (\cos \alpha, \sin \alpha)$$

$$\text{speed} = \|\vec{v}_0\| = v_0$$

Integrate:

$$\ddot{x} = 0$$

$$\dot{x} = v_x^0$$

$$x(t) = v_x^0 t + x_0$$

$$\ddot{y} = -g$$

$$\dot{y} = -gt + v_y^0$$

$$y(t) = -\frac{1}{2}gt^2 + v_y^0 t + y_0$$

We can solve
the ODE's
by direct
integration
Simplest
Case

- Put in initial conditions -

$$\vec{r}(0) = (\overrightarrow{x_0}, \overrightarrow{y_0}) = \overrightarrow{(0, 0)}$$

[cannonball on ground
at $x=0, y=0$ @ start]

$$\vec{v}(0) = (\overrightarrow{V_x^0}, \overrightarrow{V_y^0}) = V_0 (\cos \alpha, \sin \alpha)$$

$$\vec{r}(t) = (V_0 \cos \alpha) t \hat{i}$$

$$+ (-\frac{1}{2} g t^2 + (V_0 \sin \alpha) t) \hat{j}$$

Solution:

$$\begin{cases} x(t) = (V_0 \cos \alpha) t \\ y(t) = -\frac{1}{2} g t^2 + (V_0 \sin \alpha) t \end{cases}$$

Find Max

$y(t)$ maximized when $\dot{y}(t) = 0$

$$\dot{y} = -gt + V_0 \sin \alpha = 0$$

$$t_{\max} = \frac{V_0 \sin \alpha}{g}$$

Gives time t_{\max}
at which max ht
is achieved

$$y(t) = 0 \text{ when } -\frac{1}{2} g t^2 + V_0 \sin \alpha t = 0$$

$$t(-\frac{1}{2} g t + V_0 \sin \alpha) = 0$$

$$t = 2 \frac{V_0 \sin \alpha}{g} = 2t_{\max} \text{ ball hits ground.}$$

• Max height: (4)

$$y(t_{\max}) = -\frac{1}{2}g \left(\frac{V_0 \sin \alpha}{g} \right)^2 + (V_0 \sin \alpha) \frac{V_0 \sin \alpha}{g} t_{\max}$$

$$= -\frac{1}{2} \frac{V_0^2}{g} \sin^2 \alpha + \frac{V_0^2}{g} \sin^2 \alpha$$

$y_{\max} = \frac{1}{2} \frac{V_0^2}{g} \sin^2 \alpha$

• Distance traveled: (5)

$$x(2t_{\max}) = (V_0 \cos \alpha) \left(\frac{2V_0}{g} \sin \alpha \right)$$

$$= \frac{2V_0^2}{g} \cos \alpha \sin \alpha = \frac{V_0^2}{g} \sin 2\alpha$$


$x_{\max} = \frac{V_0^2}{g} \sin 2\alpha$

Example

- At a given velocity v_0 , what angle maximizes distance?

Soln: $x_{\max} = \frac{v_0^2}{g} \sin 2\alpha$ Find α such that $x_{\max} = 0$

$$0 \leq \alpha \leq \frac{\pi}{2}$$

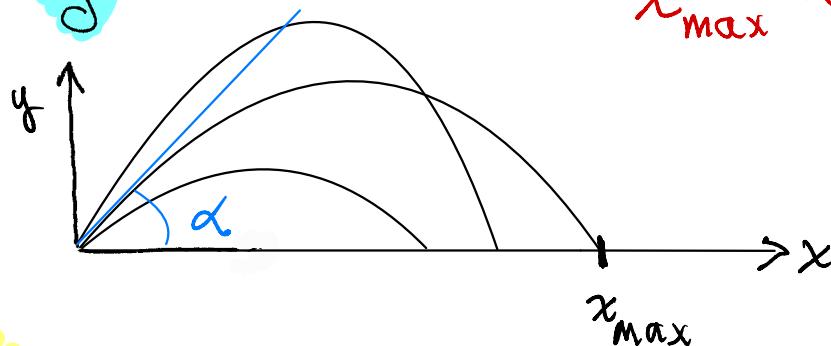

$$\Rightarrow \sin 2\alpha = \sin(2 \cdot \frac{\pi}{4})$$

max value of $\sin 2\alpha$ is at $\alpha = \frac{\pi}{4}$, $\sin(2 \cdot \frac{\pi}{4}) = 1$

Conclusion: optimal angle is $\frac{\pi}{4}$ (45°)

- Liebniz Rule = Dot product!


$$\overline{A \cdot B} = (\overrightarrow{a_1}, \overrightarrow{a_2}, \overrightarrow{a_3}) \cdot (\overrightarrow{b_1}, \overrightarrow{b_2}, \overrightarrow{b_3})$$

$$= a_1 b_1 + a_2 b_2 + a_3 b_3$$

$$= \|A\| \|B\| \cos \theta$$

Multiply corresponding entries & add

geometrical interpretation

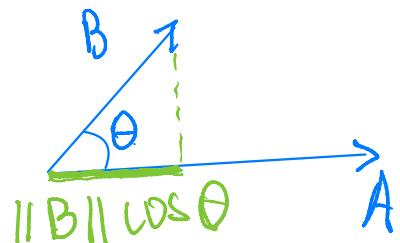

Liebniz Product Rule -

$$\frac{d}{dt} (\vec{r}_1(t) \cdot \vec{r}_2(t)) = \vec{r}'_1(t) \cdot \vec{r}_2(t) + \vec{r}_1(t) \cdot \vec{r}'_2(t)$$

{ Same for cross product - "That is"
why they are called products }

Application - Thm. If $\|\vec{r}(t)\| = \text{const}$,

then $\vec{v}(t) \perp \vec{r}(t)$. & if $\|\vec{v}(t)\| = \text{const}$,

then $\vec{a}(t) \perp \vec{v}(t)$.

(7)

Proof:

$$\frac{d}{dt} (\vec{r} \cdot \vec{r}) = \frac{d}{dt} \|\vec{r}\|^2 = 0$$

Also

$$\frac{d}{dt} (\vec{r} \cdot \vec{r}) = 2\vec{r} \cdot \overset{\bullet}{\vec{r}} \Rightarrow \vec{r} \cdot \overset{\bullet}{\vec{r}} = 0.$$

Example: Write Liebniz Product Rule for Cross Product :

Solution:

$$\frac{d}{dt} (\vec{r}_1(t) \times \vec{r}_2(t)) = \overset{\bullet}{\vec{r}}_1(t) \times \vec{r}_2(t) + \vec{r}_1(t) \times \overset{\bullet}{\vec{r}}_2(t)$$

"Whenever its called a Product, Liebniz Product Rule holds ?"