

# MAT 167

Note Title

3/28/2012

## Applied Linear Algebra

### Course Objectives:

- \* To learn the importance of linear algebra in practical problems and applications, in particular,
  - machine learning & pattern recognition
  - data mining & search engines
  - signal & image processing
  
- \* To learn important & useful concepts of linear algebra, e.g.,
  - linear transformations
  - bases & orthogonality
  - projections & least squares method
  - various matrix decompositions  
LU, QR, eigenvalue, and SVD (singular value decomposition)
  
- \* To enhance your understanding of the above concepts & applications through the use of MATLAB

# Motivation: Vector/Matrix Representation of Datasets

Example 1. Music Signals and Signal Compression  
⇒ MATLAB Demo!

Example 2. Face Image Database  
⇒ Figures


Example 3. Term-Document Matrices for Search

Example 4. Link Graphs of Webpages


## Example 1: Music Signals & Signal Compression

Consider a very short signal consisting of 3 samples

actual music signal may have  $10^6$  samples or more
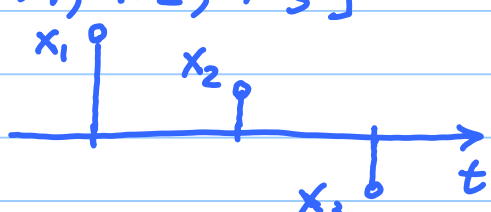
$$\underline{X} = [x_1, x_2, x_3]^T = \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$$


This vector can be represented exactly as the following sum

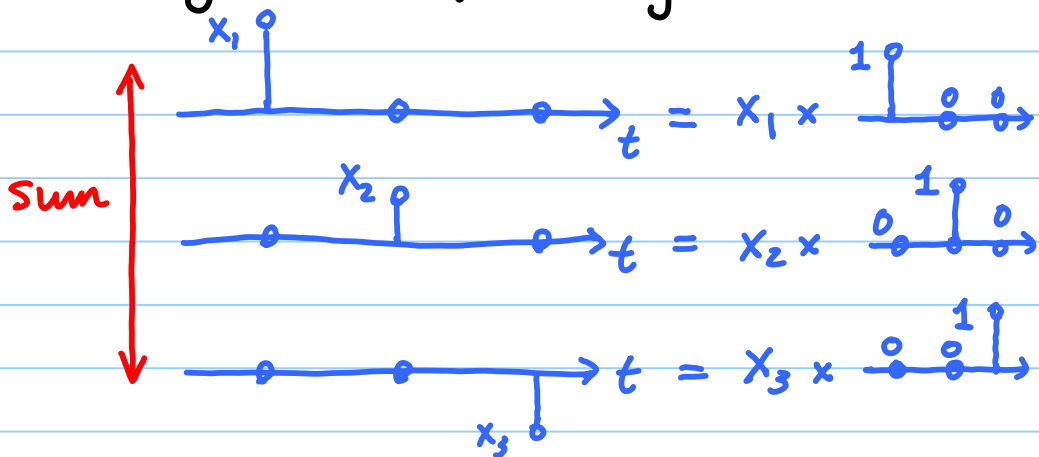

In other words

$$\begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = x_1 \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} + x_2 \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix} + x_3 \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

$$\Leftrightarrow \underline{X} = x_1 \underline{e}_1 + x_2 \underline{e}_2 + x_3 \underline{e}_3$$

Any  $\underline{X} \in \mathbb{R}^3$  can be written exactly using the linear combination of  $\underline{e}_1, \underline{e}_2, \underline{e}_3$




We can also write this as

$$\mathbb{X} = \left[ \begin{array}{c|c|c} u_1 & u_2 & u_3 \end{array} \right] \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} \frac{1}{\sqrt{3}} & \frac{1}{\sqrt{2}} & \frac{1}{\sqrt{6}} \\ \frac{1}{\sqrt{3}} & 0 & -\frac{1}{\sqrt{6}} \\ \frac{1}{\sqrt{3}} & -\frac{1}{\sqrt{2}} & \frac{1}{\sqrt{6}} \end{bmatrix} \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix}$$

$= U \alpha \Rightarrow \alpha = U^T \mathbb{X}$

basis matrix  $\rightarrow$  coordinate vector of  $\mathbb{X}$  relative to  $U$


Note

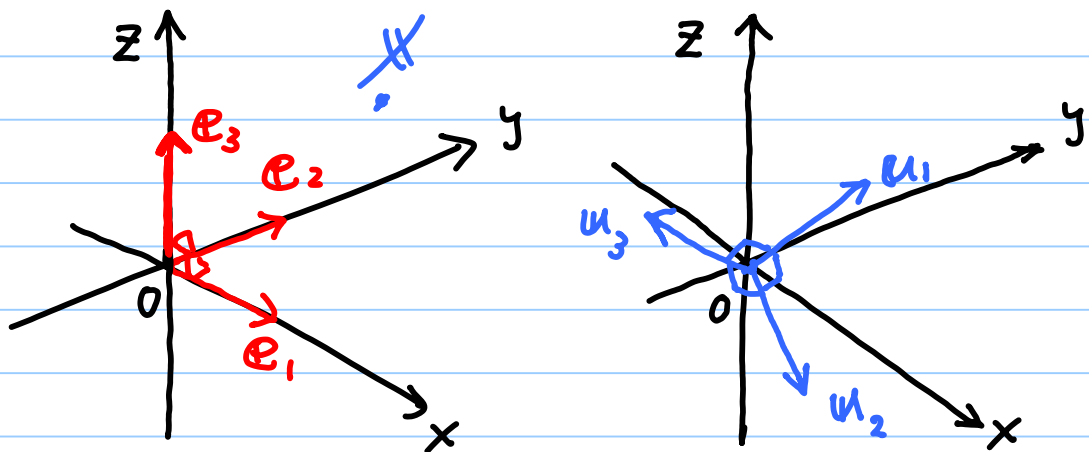

But, we can only visualize such orthogonality up to 3D. The orthogonality can be generalized to any dimension  $\mathbb{R}^n$ ,  $n \geq 1$


For a real music signal with  $n$ : huge, we can proceed similarly!

Input signal (say from your mp3 file).

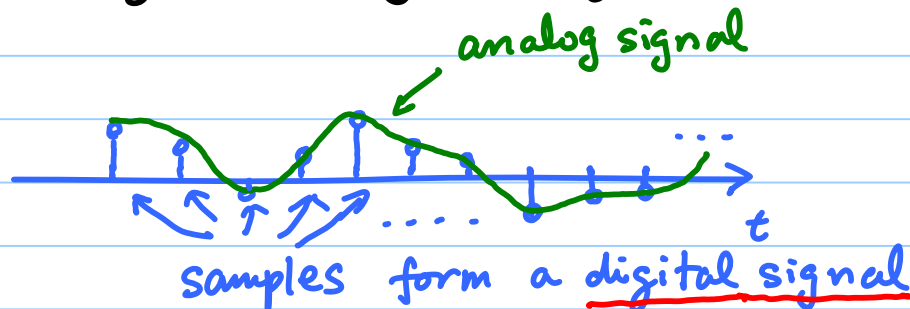


Again, we can write such a digital signal  $X = [x_1, x_2, \dots, x_n]^T$  as a linear combination of basis vectors.

The basis I

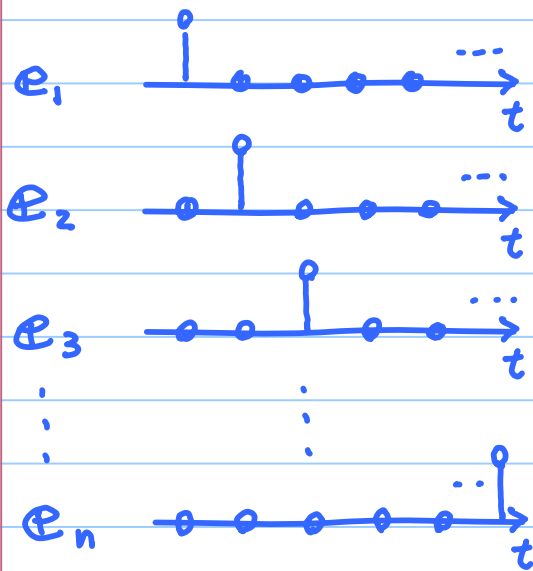

$$X = x_1 e_1 + \dots + x_n e_n$$

The basis II

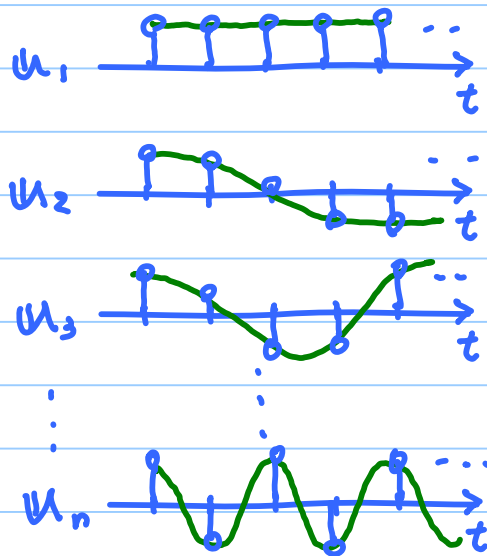

$$X = a_1 u_1 + \dots + a_n u_n$$

Appropriately choosing the basis  $\{u_1, \dots, u_n\}$   
we can compress (or more precisely  
compactly approximate) the input  
signal  $X$ !

For example, let's use the so-called Discrete Cosine Transform (DCT) basis for  $\{u_1, \dots, u_n\}$ .

Then do the following operation:

(1) Compute the coefficient vector

$$\alpha = [a_1, \dots, a_n]^T.$$

(2) For  $j = 1:n$ ,

$$\tilde{a}_j := \begin{cases} a_j & \text{if } |a_j| \geq \theta \text{ (a threshold)} \\ 0 & \text{otherwise} \end{cases}$$

(3) Let  $\tilde{\alpha} := [\tilde{a}_1, \dots, \tilde{a}_n]^T$ , and reconstruct an approximate signal

$$\tilde{x} = U \tilde{\alpha}$$

$$= \tilde{a}_1 u_1 + \dots + \tilde{a}_n u_n$$

$n = 800,791$

⇒ MATLAB Demo with my music signal

- $\theta = 0.1 \Rightarrow$  0.5% of coeff's survived
- $\theta = 0.01 \Rightarrow$  6% of coeff's survived

Also interesting to hear the approximation error  $x - \tilde{x}$ !

If you do the same experiment using  $\{e_1, \dots, e_n\}$  instead of  $\{u_1, \dots, u_n\}$ , you'll hear a huge difference! That is, for a usual music signal, the DCT basis is better than the standard (or canonical) basis  $\{e_1, \dots, e_n\}$ .